



表9.2不锈钢带抱箍与适用杆径范围对照表
Table 9.2 Comparison table between stainless steel belt hoop and applicable rod diameter

型号 Model	H1	H2	H3	H4	H5
适用最大杆径D (mm) Applicable for the largest rod diameter D (m m)	310	460	600	800	1000
重量(kg)Weight (k g)	0.45	0.50	0.55	0.6	0.7



十、螺旋防振器 Ten, spiral vibration isolator

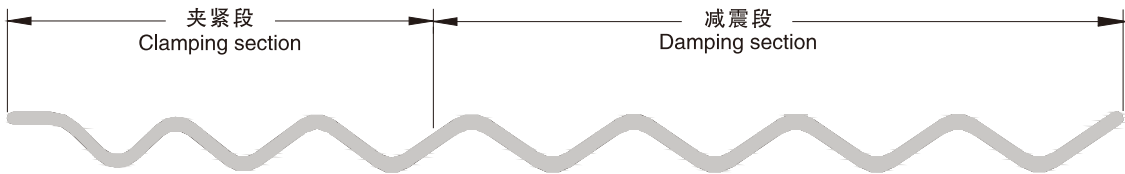

材料、用途、配置：Material, use, configuration:
此产品采用高强度、耐老化PVC塑料制成, 常用于ADSS光缆的减振装置, 和OPGW重冰区的防振。根据ADSS光缆运行张力及跨距, 常用配置见右表
This product is made of high strength, ageing resistant PVC plastic, commonly used for vibration damping devices of ADSS cables, and anti-vibration of OPGW heavy ice zone. According to the running tension and span of the ADSS cable, the common configuration is shown in the table to the right.

表10.1配置Table 10.1 Configuration

档 距 Span	配置数量/档 configuration number / file
<100M	0
100-250	2
250-400	4
400-800	6
800-1000	8

表1 0. 2规格 Table 1 0. 2 Specifications

型号 Model	适用缆径(mm) Applicable cable diameter (mm)	夹紧段长(mm) Clamping section length (mm)	总 长(mm) Total length (mm)	重量(kg)Weight (kg)
FTL0830126	6.35-8.29	250	1260	0.22
FTL1170130	8.30-11.70	250	1300	0.28
FTL1430135	11.71-14.30	250	1350	0.30
FTL1930167	14.31-19.30	330	1670	0.66