


防舞动鞭 Anti-swinging Whip

1.部件说明 Description

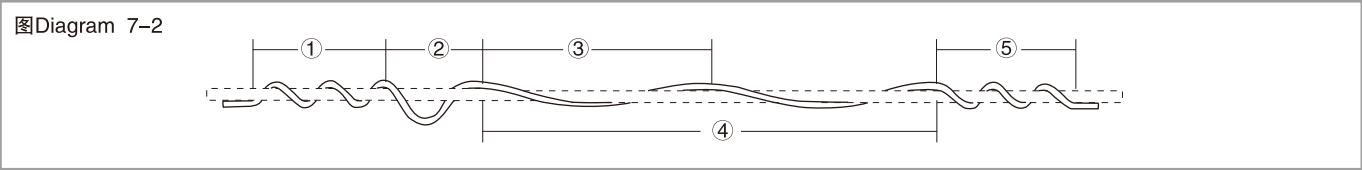

- ①握紧段：握紧缆线，由几个螺距组成(360 ° 环绕而抱紧缆线)，将防舞动鞭紧紧地固定到线缆上
- ②支撑点：支撑防舞段，支撑段在一端支撑防舞段防止其摆动，而握紧段在另一端与支撑段呼应
- ③一个螺旋长度
- ④防舞段：破坏缆线的空气运动，防舞段环绕在缆线上，能连续不断地改变缆线在风吹动下的动力学外形，从而预防缆线舞动，防舞段约两个螺距
- ① Grasp section: grasp cable twist, content of several pitches (360° encircle and grasp cable twist), fasten the anti-swinging whip tightly to the cable twist.
- ②Supporting point: supporting the anti-swinging whip.
- ③Length of one screw.
- ④ Anti-swinging section: damage the air movement of the cable twist, Prevent the cable twist swinging by change the dynamics figure of the cable twist in the wind continuously.

2.用途 Application

每个档距上安装一定数量的防舞动鞭可削减空气舞动力，防止舞动发生。
Setting a certain amount of anti-swinging whips can prevent the swinging by cutting down the air swinging force.

3.注意 Notice

- 1)档距中的导线、地线需要单独处理；
- 2)如缆线中含光纤单元，请向公司咨询；
- 3)防舞动鞭在外观良好的情况下，可重复使用。
- 1) The conductor and ground wire in the span need to handle separately;
- 2) Please consult us if there is fiber glass in the cable twist;
- 3) Anti-swinging whip could be used repeatedly under good appearance.

4.选型表 Model table

表7-3导线用防舞动鞭选型表 Table 7-3 Model table of anti-swinging whip for conductor

产品型号 Catalogue No.	适用导线直径范围Suitable conductor Dia (mm)		参考线夹长 (mm) Ref clamp length	线夹重量 (kg) Clamp weight	色标 Color
	最小Min.	最大Max.			
100	6.35	8.28	4.1	0.5	红Red
101	8.29	11.71	4.1	0.5	白White
102	11.72	14.30	4.3	1.0	橙Orange
103	14.31	19.30	4.4	1.1	黄Yellow
104	19.31	23.52	4.6	1.9	蓝Blue
105	23.53	25.88	4.6	2.0	黑Black
106	25.89	29.59	4.8	2.5	紫Purple
107	29.60	37.31	4.9	2.6	棕Brown
108	37.32	40.69	5.2	4.3	绿Green
109	40.70	44.75	5.3	4.4	粉Pink

注:以上只列出部分产品。 Note: Above sheet only includes part of the products.